



BRClamp

Module frame mounting



Assembly aid for all BRC optimizers

Quick, secure mounting directly to the module frame – for a clean and efficient installation.





Maximum time savings

The optimizers are pre-mounted to the module on the ground. All that remains to be done on the roof is to connect the string cables – perfectly prepared.



More flexibility

You can choose whether to mount the optimizer with the BRClamp directly on the module frame or attach it to the mounting frame.

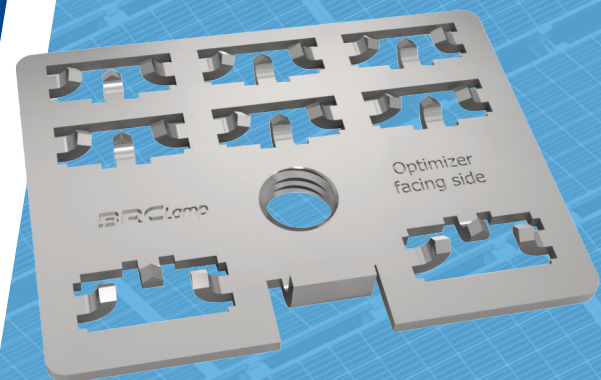


**SIMPLE.
SMART.
OPTIMIZED.**

TECHNICAL DATA

DATA	
Dimensions (W x L x H)	40 mm x 53 mm x 1,5 mm
Weight	33 g
Mounting	with supplied M8 screw
Material	stainless steel
Scope of delivery	BRClamp and M8 screw
Screw head	6 mm (internal hex socket)
Packaging unit	150 pieces per box (15 bags containing 10 pieces each)



! Please ensure that the module is suitable for optimizer mounting with the BRClamp. Observe the length of the BRClamp screw so that the rear of the module is not damaged.

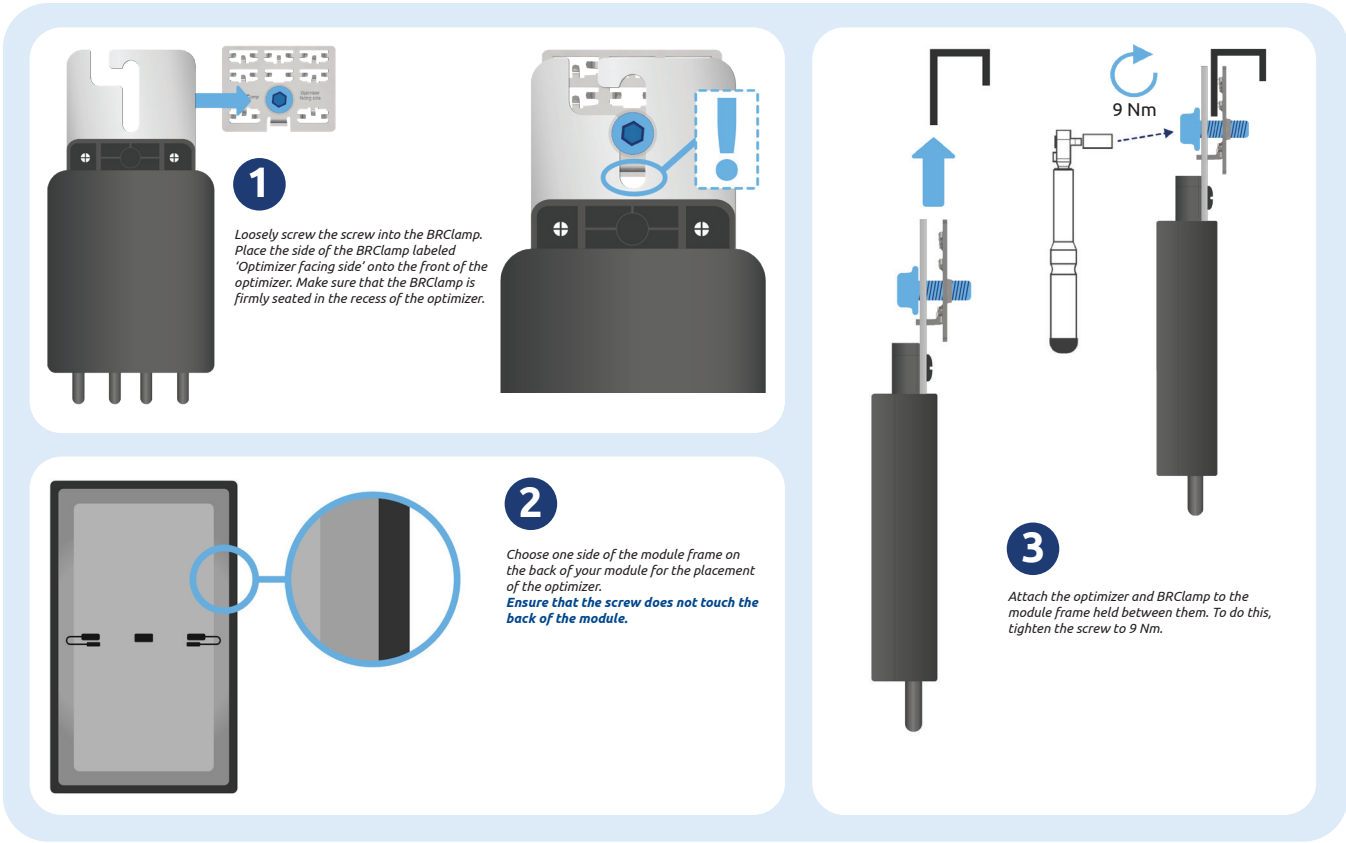

- WARRANTY**
Because of our Long-Life-Electronics we grant warranty for 25 years for all BRC-Optimizer
- LONG-LIFE-ELECTRONICS**
The Power Optimizer possesses a long-life circuit using the newest GaN technology
- MAXIMUM YIELD**
More PV-modules can be installed by using BRC Power Optimizers
- RELIABLE SUPPORT**
You can reach us for any concerns by e-mail and phone

